Apartment handset UKP-12(M) is intended for use in VIZIT multi-apartment doorphones.

## **FEATURES**

- Duplex intercom;
- CALL indicator;

Handset

Mounting kit

Operating instruction

- Ring volume slide switch;
- DOOR OPEN button.

### PARTS LIST

1 pc

1 pc

1 pc

# **SPECIFICATIONS**

54 x 200 x 40 Dimensions, mm 0.18 Weight, kg Color: - UKP-12 - UKP-12M Ambient temperature range up to 93% at 25 °C Relative humidity of air

white silver/grey from 5 °C to 45 °C

### SAFETY INSTRUCTIONS

The handset does not contain voltage above **15 VDC**. Do not connect the handset to a telephone line! Do not make any connections when the power is on.

#### INSTALLATION

Outward appearance and controls layout are shown on Figure 1.

- 1. Connect a two-wire cable from the commutator to the handset terminals on the back of handset holder, observing polarity.
- 2. Fix the holder on a wall. Use the mounting kit.
- 3. Hang up the handset.

Set the ring volume switch to the desired position (I – max. / 0 – min.). It affects earpiece volume as well.

Press the DOOR OPEN button during intercom to unlock the door.

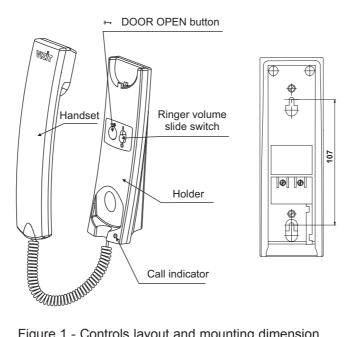


Figure 1 - Controls layout and mounting dimension